

LED Premium Flood Light – Wattage Select 80/100/120W


With Built in Sensor - Optional Use - By Remote

Model: TL-PFLWS80100120W

LED flood lights are suitable for both outdoor and indoor commercial application such as parking areas, billboards and common areas.

Product Features

- Built In Sensor
- Aluminium die cast housing
- Tempered glass face
- Long operating life and performance
- Wattage Select
- 120° Beam Angle
- IP66 Waterproof housing

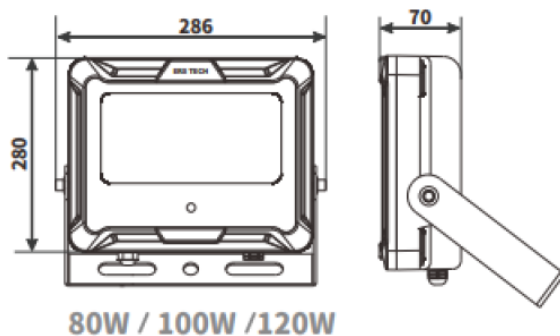

SPECIFICATION

Colour	Cool White (5500K)
Lumen (lm)	80W-17,600Lm / 100W-22,000Lm / 120W -206,40Lm
Efficiency (Lm/w)	>220lm/w
Light Source	Lumileds 3030
CRI (%)	>80%
Beam Angle	120°
Power Requirement	AC 220~240V
Power Consumption	Wattage Select 80W-100W-120W
Housing	Die Cast Aluminium and Tempered Glass
Lifespan	> 40,000 hours
Operation Temperature	-20°C~+40°C
Dimension (mm)	286 × 280 x 70
Sensor (option)	Daylight & Microwave Motion Sensor
Protection Rating	IP66
Warranty	5 years