










LED Slimline Flood Light – 600W


Model: TL-SFL600W

LED flood lights are suitable for both outdoor and indoor commercial applications such as parking areas, billboards and common areas.


Product Features

- **Quality Driver**
- Aluminium die cast housing
- Tempered glass face
- Full range power input 90~305VAC
- Weight: 23kg
- IP66 Waterproof housing

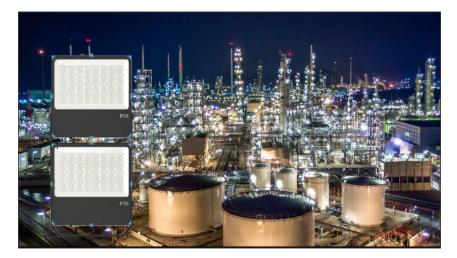

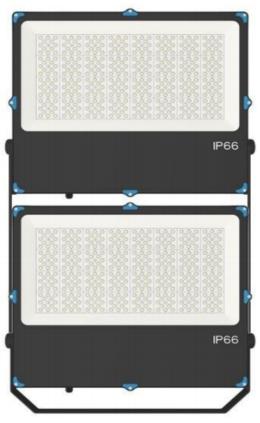





| SPECIFICATION | |
|-----------------------|--|
| Colour | (5000K) |
| Lumen (Im) | 79,908lm |
| Efficiency (Lm/w) | >132lm/w |
| Light Source | LED |
| CRI (%) | >80% |
| Beam Angle | 90° |
| Power Requirement | AC 90~305V |
| Power Consumption | 600W |
| Housing | Die Cast Aluminium and Toughened Glass |
| Lifespan | > 50,000 hours |
| Operation Temperature | -20°C~+60°C |
| Dimension (mm) | 503 x 1140 x 64mm |
| Impact Rating | IK08 |
| Protection Rating | IP66 |
| Warranty | 5 years |

Email: info@tallislighting.com.au