





## LED Slimline LED Flood Light – 800W


Model: TL-SFL800W


LED flood lights are suitable for both outdoor and indoor commercial applications such as parking areas, billboards and common areas.

**Product Features** 

- Quality Driver
- Aluminium die cast housing
- Tempered glass face
- Full range power input 90~305VAC
- Weight: 23kg
- IP66 Waterproof housing



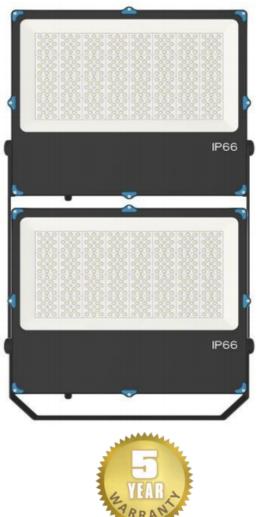



| SPECIFICATION         |  |
|-----------------------|--|
| Colour                | (5000K)                                |
| Lumen (Im)            | 105,448lm                              |
| Efficiency (Lm/w)     | >132lm/w                               |
| Light Source          | LED                                    |
| CRI (%)               | >80%                                   |
| Beam Angle            | 90°                                    |
| Power Requirement     | AC 90~305V                             |
| Power Consumption     | 800W                                   |
| Housing               | Die Cast Aluminium and Toughened Glass |
| Lifespan              | > 50,000 hours                         |
| Operation Temperature | -20°C~+60°C                            |
| Dimension (mm)        | 503 x 1140 x 64mm                      |
| Impact Rating         | IK08                                   |
| Protection Rating     | IP66                                   |
| Warranty              | 5 years                                |

Tallis Lighting & Energy Solutions Pty Ltd. 1/13 Commerce Circuit, Yatala Qld 4207 Phone: 1300 494 995 Website: <u>www.tallislighting.com.au</u> Email: <u>info@tallislighting.com.au</u>